

GFXterm - VT100/ANSI Terminal Emulation with Graphics Support

Overview:

GFXterm has been designed as a simple terminal emulator for use with Geoff Graham's single-chip Micromite computers running MMbasic. As such, it provides just enough VT100/ANSI emulation to use the Micromite's inbuilt editor with an 80 column by 24 line screen size.

In addition, GFXterm supports a simple set of graphics extensions that are suitable for drawing very basic rolling graphs. Lines and arcs can be drawn, enclosed regions filled, and rectangular areas scrolled in any direction. Graphics are drawn on a separate 'glass layer' overlaying the normal text screen. This layer is turned off by default, being turned on by any successful graphics command being processed. The graphics layer can then be turned off again by pressing **alt-C** to clear graphics. GFXterm runs slightly faster with graphics turned off.

Text and graphics layers operate completely independently and do not in any way interact, with the text layer visible through 'clear' areas of the graphics layer (wherever pixels are: R=0, G=0, B=0).

Operation:

Run the program "GFXterm.exe". The only thing needed to run GFXterm is this single .exe file. Upon start-up you will be presented with an empty terminal window and flashing red block cursor, with the terminal sitting in the disconnected (local loopback test) state - ascii keypresses will be printed to the screen and control characters processed.

To connect to an attached Micromite, right-click anywhere on the terminal window, and select **CONNECT** from the popup menu that appears. You will be prompted to select a comm port and baud rate, either via text entry of <port>:<baud> or a pair of dropdown menus (note that by default the Micromite console runs at 38400 baud). Press **ENTER** and you should be connected to the Micromite - if there is something wrong that prevents connecting an error window will pop up.

The right-click menu is the main method of controlling GFXterm, although a number of the functions also map to shortcut (**alt-**) keys. There are also a few functions that are only accessible through shortcut keys.

Menu Commands:

CONNECT / DISCONNECT - used to connect to or disconnect from a Micromite. Normally GFXterm will remember the last successfully used connection information. The comm port and baud rate are selected from two dropdown menus, however if the **shift** key is held while selecting CONNECT a connection string is prompted for. If your Micromite is attached to COM3 and you have not changed the default console baud rate, then the connection string would be:

com3 : 38400

Other parameters are hardwired to 8 data bits, 1 stop bit, no parity, no flow control.

LOG to file / STOP logging - used to save terminal output from the Micromite to a text file. Only plain text is saved, no colour or cursor location information, so logging to a file while the Micromite's inbuilt editor is in use will produce a great deal of mostly garbage in the log file. Normally, logging will be used to save program output, or in conjunction with **LIST ALL** to save a program held within the Micromite to your PC.

paste (from clipboard / from text file) - these two options can be used to upload a program to the Micromite. GFXterm detects if pasting into the Micromite's inbuilt editor and slows down to accommodate. While at the MMbasic command prompt, you can first type **AUTOSAVE** to quickly save a program directly to the Micromite's flash memory. Paste from clipboard is also mapped to the **alt-P** key combination.

HINT: if pasting into the Micromite's inbuilt editor, always ensure there is a space character to the right of the cursor before pasting in order to suppress automatic line indenting.

CANCEL paste - immediately cancels any paste operation that is in progress, in case of inadvertently pasting from an unintended source. This function is also mapped to the **alt-Z** key combination.

font size (9, 12, 14 point) - selects between different screen font sizes. The default size is 9 point, if changed GFXterm remembers the new setting. Note that changing the font size also changes the horizontal and vertical pixel counts for graphics, but that these values can be read from GFXterm by the Micromite before using any graphics.

font colour (Red, Green, Yellow, Blue, Magenta, Cyan, WHITE) - selects the default text colour, this is remembered by GFXterm. The default colour setting is WHITE. Note that the Micromite can override this setting, as happens when the inbuilt editor is used with **OPTION COLOURCODE ON**.

dimnable text (enabled, bright #1, bright #2) - selects how the **SGR 2** (dim foreground) escape sequence is handled. When enabled (default), the foreground colour can be selected between bright and dim with **SGR 2** while the background colour is always dim. Selecting bright #1 overrides **SGR 2**, forcing the foreground colour to always be bright, while bright #2 also forces the background colour (unless black) to be bright. This setting is remembered by GFXterm.


clear (GFX layer, text layer, ring buffer) - these commands are also mapped to the keys **alt-C**, **alt-D**, and **alt-A** respectively. The most useful one of these will be **alt-C** where a program has drawn on the graphics layer and you want to clear this so as to see underlying text when going back into the Micromite's inbuilt editor.

select and copy - this displays a monochrome text-only view of the terminal screen from which it is possible to select text with the mouse and then copy it to the clipboard using **ctrl-C**. The view is a frozen snapshot, with the remainder of GFXterm continuing to operate in the background. Press **ENTER** or **ESC** to exit this view.

command window - this pops up a small auxiliary window that displays VT100/ANSI and GFX commands as they are processed. This information can be exceptionally useful when trying to figure out what has gone wrong when using graphics, as well as to obtain a better understanding on how the Micromite's inbuilt editor works. The command window can be closed by clicking on the **x** in its top right corner, with information only added to the window when it is visible.

Keyboard Shortcuts:

alt-Z	cancel any paste operation that is in progress	<i>(also a menu item)</i>
alt-A	clear ring buffer (64k buffer used for serial input)	<i>(also a menu item)</i>
alt-C	clear graphics layer	<i>(also a menu item)</i>
alt-D	clear text layer	<i>(also a menu item)</i>
alt-P	paste from clipboard	<i>(also a menu item)</i>
alt-R	RESET terminal	
alt-B	send break, signals 1455 firmware to reset Micromite	
alt-ENTER	insert a divider line in the command window output	

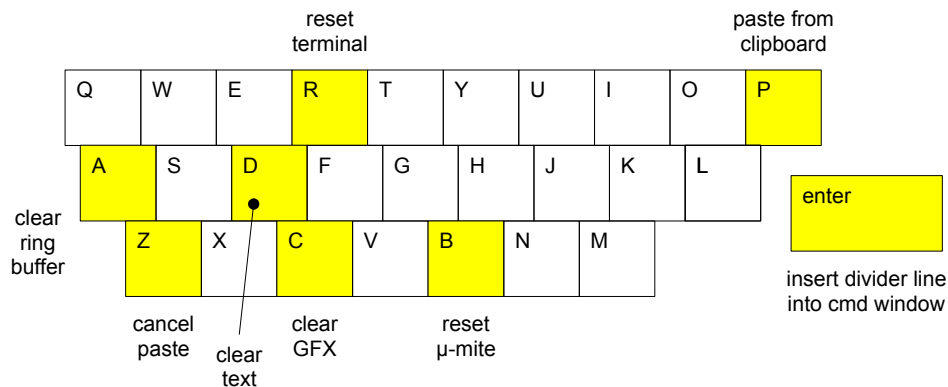

Status Line:

Above the terminal screen is a status line that displays various useful pieces of information about the terminal session. This includes last character received and key pressed, current cursor location, timing information, and various status indicators:

```
00 row=01 col=01 key=00 000mS 000mS 00% online logging [000000] (00,00)
1. 2. 3. 4. 5. 6. 7. 8. 9. 10. 11.
```

- last printable character received
- cursor position, current row
- cursor position, current column
- last ascii key pressed
- time since last serial data received
- time since last serial data transmitted
- percentage of ring buffer in use
 - silver <10% used
 - light blue %10 to %39 used
 - yellow %40 to %69 used
 - red >70% used
- online annunciator (green when connected)
- file logging annunciator (yellow when logging to file)
- number of characters waiting to be pasted:
 - green fast paste
 - light blue slow paste
- mouse character cell location within terminal screen area

VT100/ANSI Commands:

See the document "VT220 partial escape sequence list.pdf" for a full list of the commands that have been implemented (marked with ticks). VT-52 compatibility mode has not been implemented.

Colour for text and background (using **SGR**) is supported, with 8 possible colours for each. Background colours are dimmed, while foreground colours are bright by default. However, a dim foreground attribute (**SGR 2**) is available to effectively give 16 foreground colours if dimmable text has not been disabled. The blinking attribute (**SGR 5**) is ignored.

The scroll region can be set with **DECSTBM**, but only **IND**, **NEL**, **RI**, **CUU**, **CUD**, and **LF** make use of the margins set. Commands for deleting and inserting characters and lines (**IL**, **DL**, **ICH**, **DCH**, and **ECH**) are currently not supported, as the Micromite's inbuilt editor does not make use of these. Setting and clearing tab stops is also not supported, with tab stops instead fixed at every 8 columns.

AutoWrap at end-of-line is hardwired on, and cursor positioning is permanently fixed to absolute - location (1,1) being top-left of the terminal screen irrespective of any top or bottom margins set with **DECSTBM**.

Mouse scroll wheel activity is mapped to the cursor up/down keys, and will work with the Micromite's internal editor. Further to this, mouse position reporting (X10 only) can be turned on/off with **SM / RM ?9**, **?1006**, and **?1015**, thereby supporting programs that are 'mouse aware'.

GFX Commands:

The syntax of a GFX command string is as follows:

<DLE> command parameter,..., parameter <CR> [<LF>]

where the command and parameters (all in plain text) can be separated by spaces, commas, semicolons, or tab characters. A GFX command string is terminated by a carriage return, with any immediately following line feed skipped. **<DLE>** (data link escape) is **chr\$(16)**.

For example, to draw a circle with centre at (100,100), radius 50, coloured green using a brush 3 pixels wide, the following lines of MMbasic code would be used:

```
PRINT chr$(16) "i" 0, 255, 0, 3
PRINT chr$(16) "a" 50, 50, 150, 150, 0, 0
```

Commands are detailed in the file "GFX commands.pdf", and can be written in full, or just the first letter, and can be upper or lower case. The best understanding of how to use GFX commands is to look at the sample programs provided: "GFX demo 2.bas" and "GFX bouncing ball.bas". The commands are, on the whole, just wrappers for windows graphic object commands.

Note that the horizontal and vertical pixel counts are dependant on the font size selected in GFXterm, hence any program using graphics should first issue the "?" command to retrieve these counts and scale output accordingly. The "ink" command accepts red,

green, and blue parameters with each ranging from 0 to 255. An ink colour of 0,0,0 is transparent - for black use 1,1,1 instead.

The origin for all graphics commands is the bottom left corner of the terminal window.

The "arc" command can draw circles, ellipses, or parts thereof. The angles specified are in degrees, with 0 degrees due north (12 o'clock), positive values moving clockwise - set start and finish as both 0 for a full circle or ellipse. The "fill" command expects a fully enclosed area bounded by the current ink colour, flood filling the enclosed region with that same colour. You can not fill with a different colour.

To prevent overflowing the serial input ring buffer, a program can synchronize with GFXterm using the control codes **<ENQ>** and **<ACK>** (`chr$(5)` and `chr$(6)` respectively). When GFXterm sees an **<ENQ>** as it processes incoming serial data, it responds by sending an **<ACK>**. This allows an MMbasic program to wait for GFXterm to catch up.

*Remember: the keyboard shortcut **alt-C** clears the graphics layer - when creating scrolling graphs this can be extremely useful to view the text underneath.*

Robert Rozee
5-December-2017